



Side Sealing & Cutting Machine

Features

- High positioning, sealing and cutting accuracy ensured with a high quality design
- Auto-stop if material runs out
- High accuracy provided by precision photocell sensor
- Auto-stop if printing mark out of position
- Imported high speed conveyor belt & electronic parts for long service life
- Convenient to change for various bag types
- Ruggedly constructed for maximum stability during high speed production
- Touch screen for easy setting
- Custom design is available
- Multiple functions for different bag types

» SDH-263S



SDH-262S
SDH-263S

SDH-323S
SDH-403S

Optional Equipment

- Round hole punching device
- Ultrasonic longitudinal sealing device
- Auto slider insertion device
- Handle puncher
- Inline folding device
- Auto-hanger insert device
- Bag dividing device
- Zipper attachment
- EPC (edge position control)
- Perforation device for easy tear
- Pocket insert device
- Auto-collecting device
- 2 Servo for free tension device
- Euro hole puncher
- Pri-sealing device
- Chicken bag device (round bottom)
- Hot stamping device




Side Sealing

| Model | SDH-262S | SDH-263S | SDH-323S | SDH-403S |
|--------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Available Material | PP, OPP, CPP, LDPE, HDPE | PP, OPP, CPP, LDPE, HDPE | PP, OPP, CPP, LDPE, HDPE | PP, OPP, CPP, LDPE, HDPE |
| Width of Bag | 20 ~ 150 mm | 50 ~ 600 mm | 50 ~ 600 mm | 50 ~ 600 mm |
| Length of Bag | Max. 580 mm | Max. 600 mm | Max. 760 mm | Max. 960 mm |
| Speed pcs/min ① | Max. 250 | Max. 200 | Max. 200 | Max. 160 |
| Thickness ② | 0.015 ~ 0.08 mm | 0.015 ~ 0.08 mm | 0.015 ~ 0.08 mm | 0.015 ~ 0.08 mm |

① Depends on material, bag type and size

② Depends on material type

* Specifications are subject to change without notice.

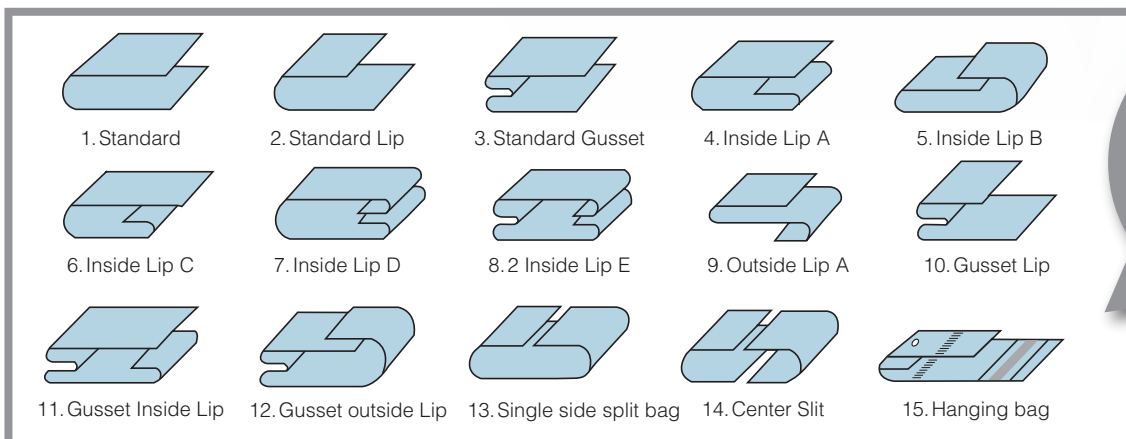

A wide variety of bag shapes are available



S-Dai Industrial Co., Ltd.

No. 32, Alley 16, Lane 418, Chien Te Street E.Dist. Taichung 40418, Taiwan

TEL:+886-4-22833456 FAX:+886-4-22833459 www.s-dai.com.tw s@s-dai.com.tw



ISO 9001:2015