




Embossing & Gusseting Machine

Features

- Shaftless unwinding for easy loading
- Variable main speed. Maximum speed 60 meters per minute provides high capacity
- Guaranteed gusset quality without being affected by roller pressure variation. Adjustable gusset depth range: Roller 25~75mm
- The machine is equipped with an emergency stop wire. If an abnormal situation occurs, the operator can quickly pull the wire to immediately stop the machine
- Superior knurling effect: The specially designed machine structure combined with an outstanding control system assures superior embossing operations
- The unwinder is equipped with an edge position controller

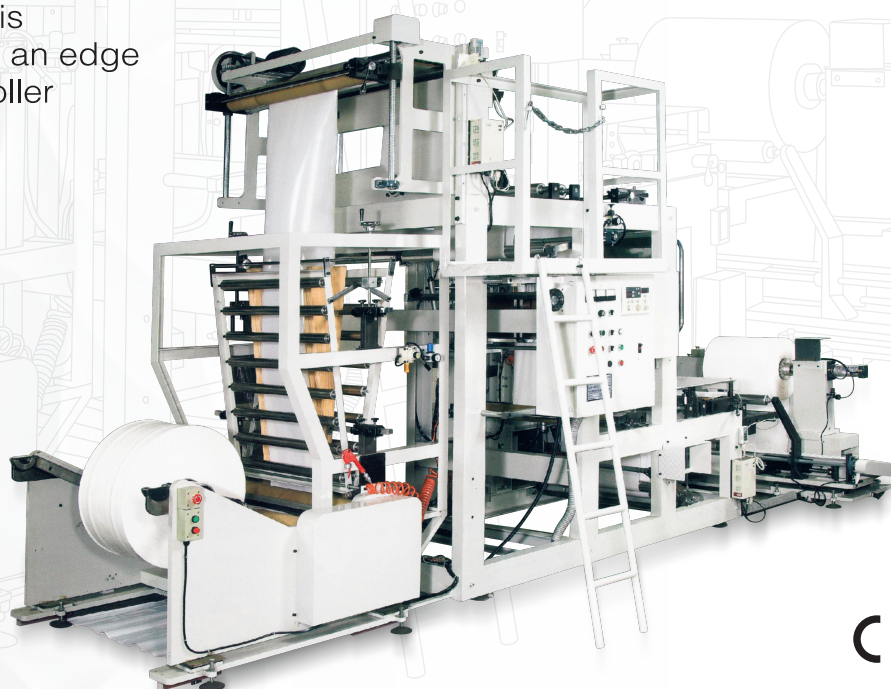


»SD-CD40



SD-CD40

Suitable material

- PE

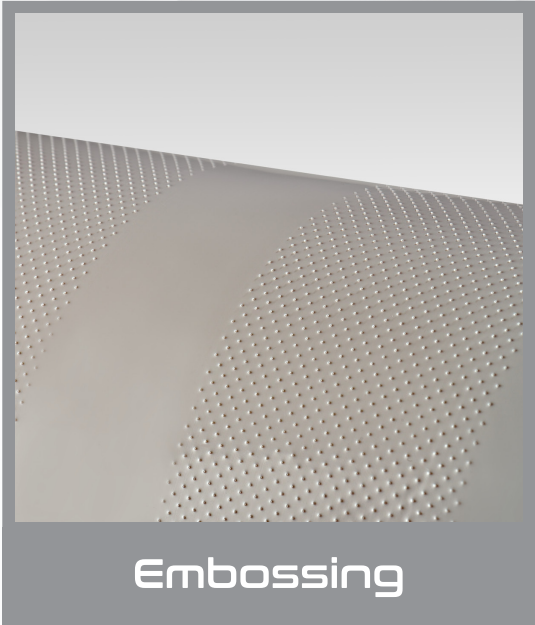

Model	SD-CD40
Machine Speed	10-60 M/min, depending on material
Material Width	Max. 750 mm, Min. 450 mm
Material Thickness	0.1~0.3 mm
Gusseting Depth	25 mm~75 mm
Unwind Diameter	1000 mm Max.
Rewind Diameter	1000 mm Max.
Power Required	6 KW
Machine Dimensions	580 x 240 x 330 cm
Packing Dimensions	275 x 230 x 200 cm
	325 x 230 x 250 cm
	235 x 120 x 90 cm
Net Weight	3450 kg
Gross weight	5000 kg

★ Specifications are subject to change without notice.



S-Dai Industrial Co., Ltd.

No. 32, Alley 16, Lane 418, Chien Te Street E.Dist. Taichung 40418, Taiwan
TEL:+886-4-22833456 FAX:+886-4-22833459 www.s-dai.com.tw s@s-dai.com.tw



ISO 9001:2015